


Easy-Ship Drying Rack

Assembly Instructions

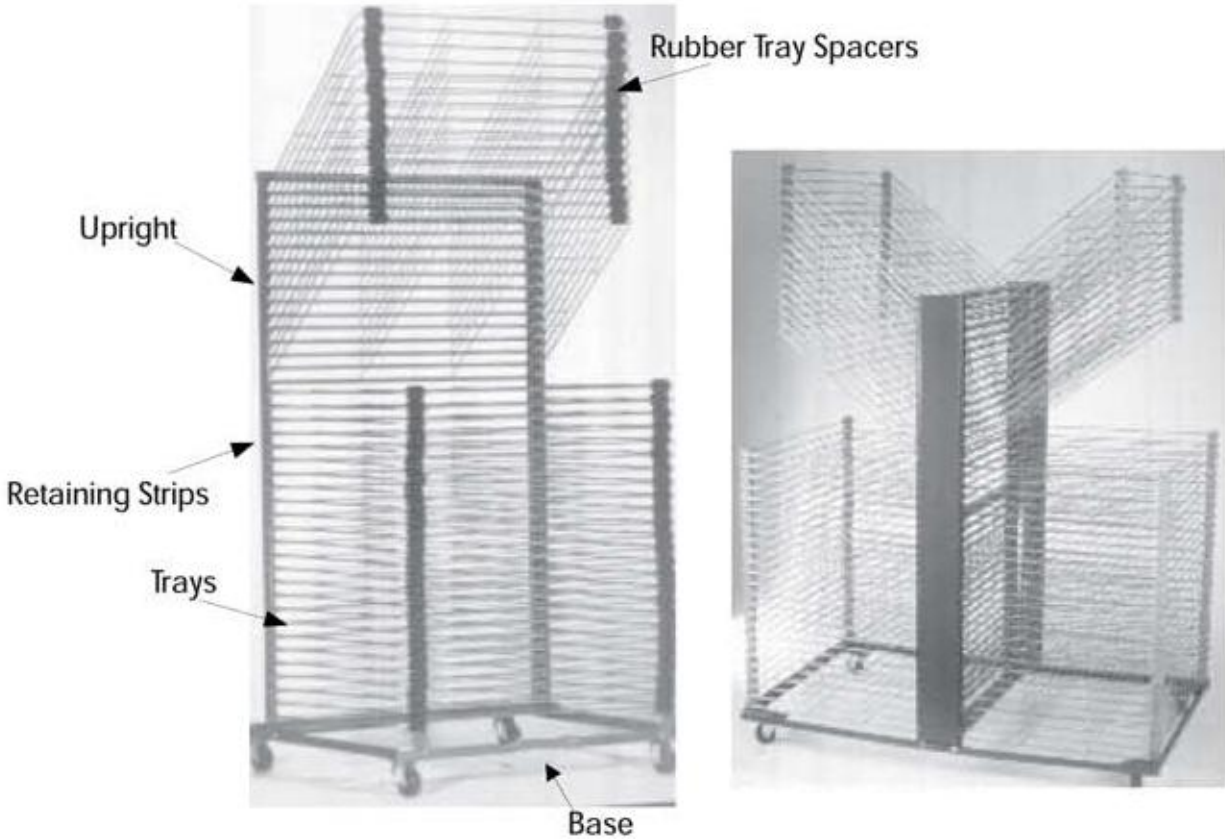

Easy-Ship Parts List

- 40 – Trays (4 bundles of 10)
- 1 – Upright (slotted frame)
- 1 – Base (square frame)
- 2 – Tray retaining strips
- 80 – Rubber spacers (40 per bag)
- 1 – Bag of assembly hardware

Easy-Ship Double Parts List

- 80 – Trays (8 bundles of 10)
- 1 – Upright (slotted frame)
- 1 – Base (square frame)
- 2 – Tray retaining strips
- 160 – Rubber spacers (40 per bag)
- 1 – Bag of assembly hardware

Proudly manufactured in the USA by:

**Gran Adell Mfg
1111 W Winona
Chicago IL 60640
P 773-769-4200
www.granadell.com**

1. Mount each caster to the base using 4 medium sized screws, lockwashers, and nuts.
2. Mount the upright to the base with 4 large screws, lockwashers, and nuts. The slots should face the long end of the base.
3. Find the slot in the rubber tray spacers and install two spacers to the front wire of the tray.
4. Orient the tray so that the double wires are at the back, and the mesh wires are on top of the outer wire. Install this first tray in the top slot in the upright by inserting the back wires into the top two slots and then rotating the tray up to its raised position. The back wires should slide into the angled slot and stay up.
5. Continue with the other 39 trays working from the top to the bottom.
6. Attach the retaining strip to each side of the upright with 8 small screws.
7. Assembly of the Easy-Ship double is the same except that the upright mounts in the middle of the base, and there are 80 trays to install.


To operate your Easy-Ship Rack

To Lower a Tray:

Grasp the front of the tray and pull up and forward. When two back wires have moved from point A to point B, the tray can be lowered to its normal position.

To Raise a Tray:

Lift the tray up to approximately 45 degree angle, and then gently push the tray so that the back wires move from point B to point A.

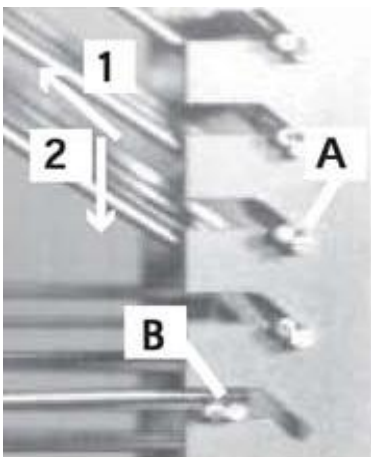

Gran Adell Mfg
1111 W Winona
Chicago IL 60640